

BL 8060 BILOBA
100 Kg - 220 lbs
Porte - Doors


• Cerniera oleodinamica (aletta spostata) con regolazione delle velocità di chiusura dell'anta. Stop a 0° +90°. Adatta per porte in battuta.

• Hydraulic hinge (with offset fixing wing) with adjustment of the closing speed of the door. Stop at 0° +90°. Suitable for doors with stop.



Disponibile anche nelle versioni: 1) senza fermi a 90° - 2) per porte di larghezza inferiore a 500 mm utilizzare art. BL 8060 + BL 8060 SOL.
Versioni da specificare in fase d'ordine e soggette a possibili minimi d'ordine. Per ulteriori informazioni contattare l'ufficio commerciale.

Available in further two versions: 1) without 90° stop - 2) for doors with width less than 500 mm use items BL 8060 + BL 8060 SOL.

Both have to be specified on being ordered and could be subjected to minimum quantity order. For further information contact the export department.


Testata 1.000.000 cicli - Tested for 1.000.000 cycles



Classificazione secondo normativa - Clasificación según la ley - Classification according to int'l regulation Klassifizierung nach den Vorschriften - Classification selon la norme

UNI EN 1154 : 2006

3 8 ²/₅ 0 1 4

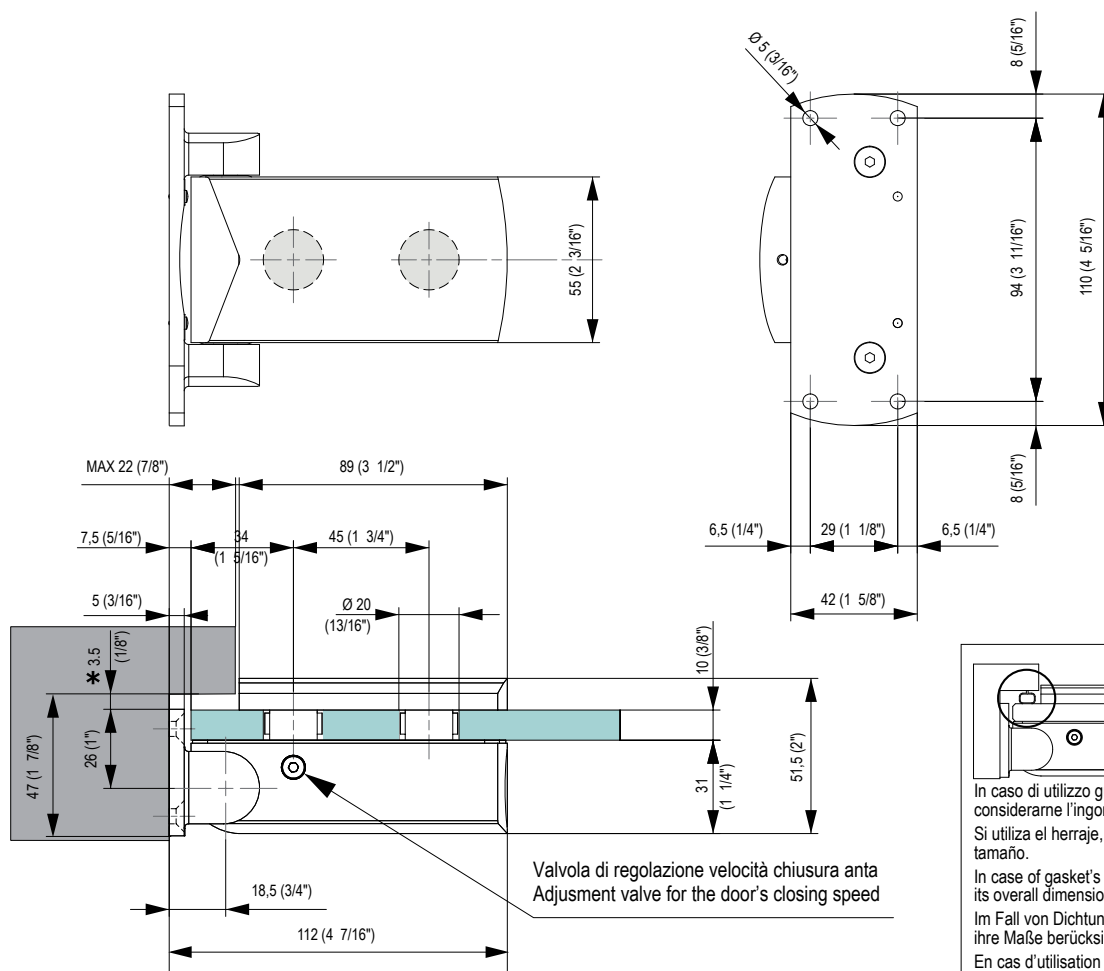

* Distanza minima da filo muro per consentire rotazione vetro
Distancia mínima de hilo pared, para facilitar la rotación del vidrio
Minimum distance from wall edge in order to facilitate glass rotation
Mindestdistanz von der Wandkante, um die Glasrotation zu erleichtern
Distance minimum de l'arrête du mur pour permettre la rotation du verre



Alluminio / Aluminium : 02-05-13-14-15-16-17-RAL-62-88-95



Aperture violente oltre i 95° potrebbero causare lo scardinamento. È consigliabile l'applicazione di un fermoporta.
Violent opening further than 95° could unhinge the door. We suggest to install a door stop.

